


Constant VC ESD Product

Product Introduction



- 1.Ultra-thin package shape, can be used in miniaturized circuit;
- 2.Bidirectional protection;
- 3.Widely used in low speed signal line, control bus, power line electrostatic protection;

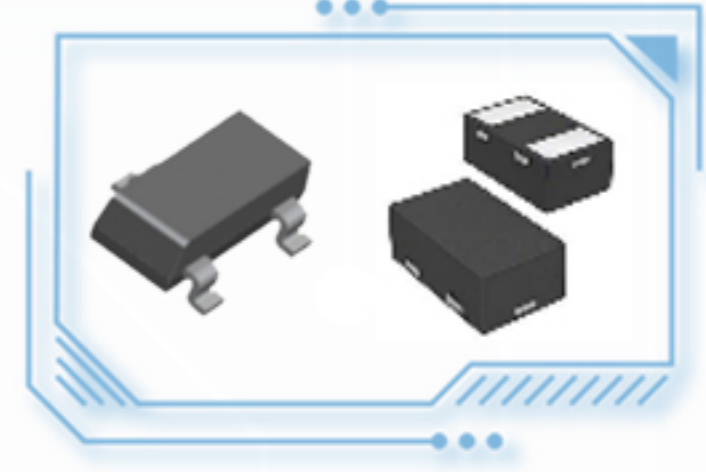



Product Features

■ Low VC level, the rate of change for VC vsIPP is very less.




1、VC-IPP Curve

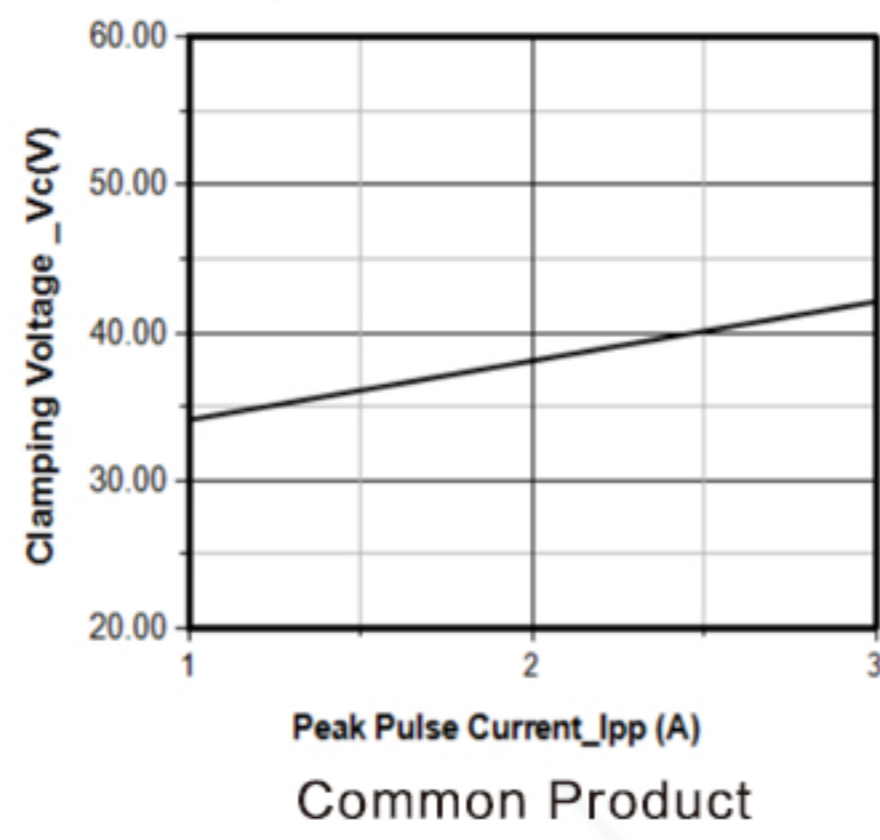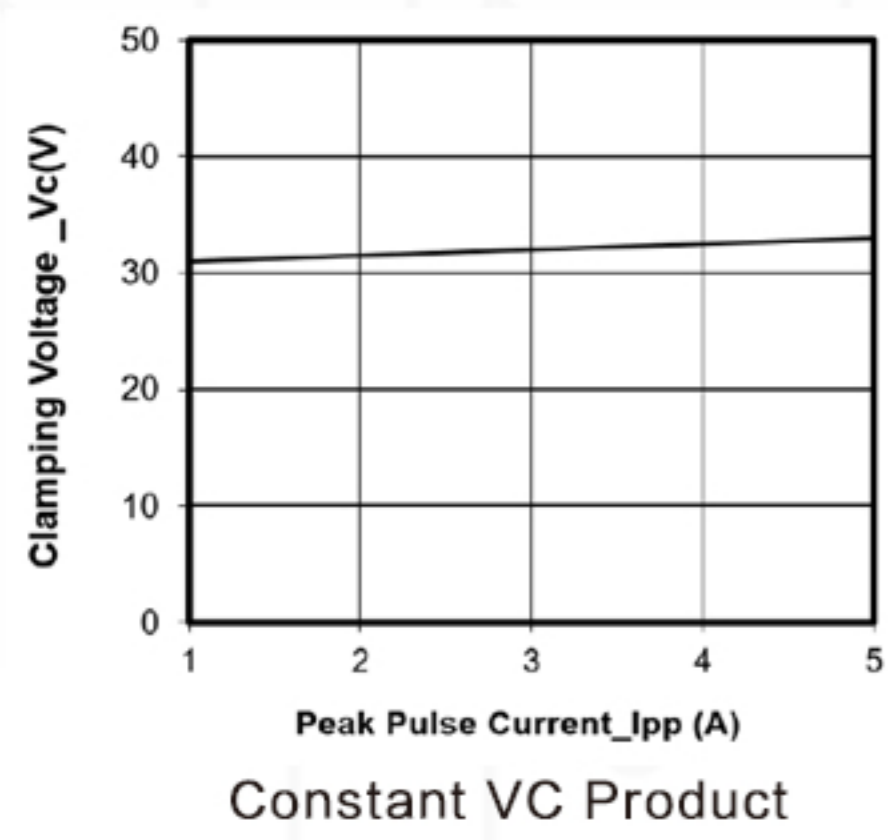

2、TLP Curve

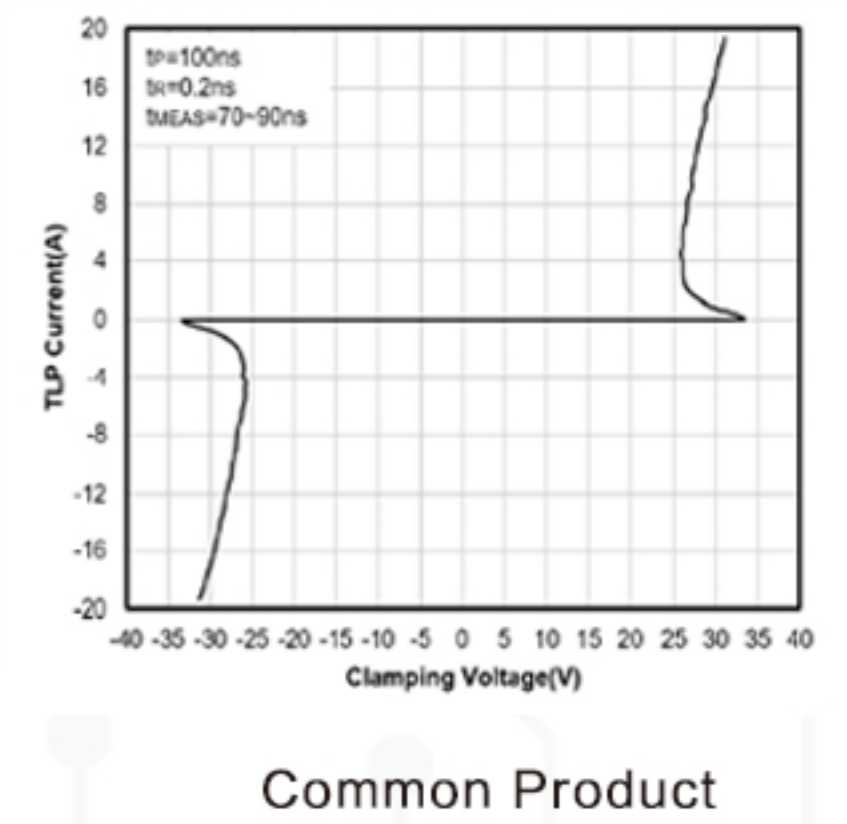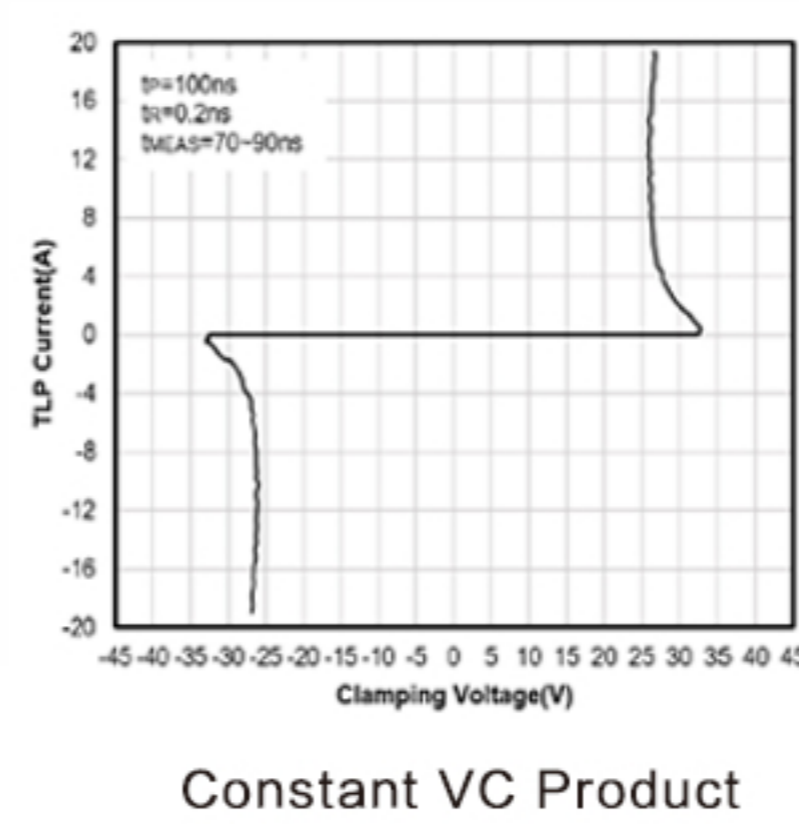

Electrical Parameters

P/N	Configuration	VRWM(V)	IPP MAX(A) @8/20μs	VC(V) @IPP MAX	Cj(pF) Typ	Package
HESD2402EB		24	13	34.5	15	SOT-23
HESD24VLB		24	5	36	5	DFN1006-2L
HESD24VLZB		24	5	36	5	DFN0603-2L

For more products, please refer to the official website

Application

